

# 250A

## Distribution Board



<b>Product Name</b>	<b>250A</b>
<b>Manufacturer</b>	Schneider Electric
<b>Category</b>	Distribution Board


### TECHNICAL SPECIFICATIONS

<b>Electrical Specifications</b>	
System Voltage	3Ph., 400V, 50Hz
Neutral/Earth System	Separate (TN-S)
Major Components	Schneider Electric
Auxiliary Supply Voltage	230V AC
Auxiliary Supply Origin	From incomer
Wiring	Control 1.5 sqmm, C.T Wires 2.5 sqmm
<b>Bus Bars (mm)</b>	
Main (vertical)	20x10 mm
Neutral	20x10 mm
Earth	20x5 mm
<b>Connections</b>	
Inlet	1x250A Breaker
Outlets	2x125A 5pin, 3x63A 5pin, 4x32A 5pin, 4x32A 3pin
Termination Direct to Device	Incoming
Termination Through Socket	Outgoing
Cable Entry	Bottom Incoming / Outgoing
Access	Front Incoming / Outgoing

# 250A Distribution Board

Extras	
Enclosure	Canopy stand, weather proof
Material	RAL 7032 sheet steel
Degree of Protection	IP-55
Mounting	Pedestal
Presentation	Functional door
Type of Construction	Form-2

## WEIGHTS & DIMENSIONS

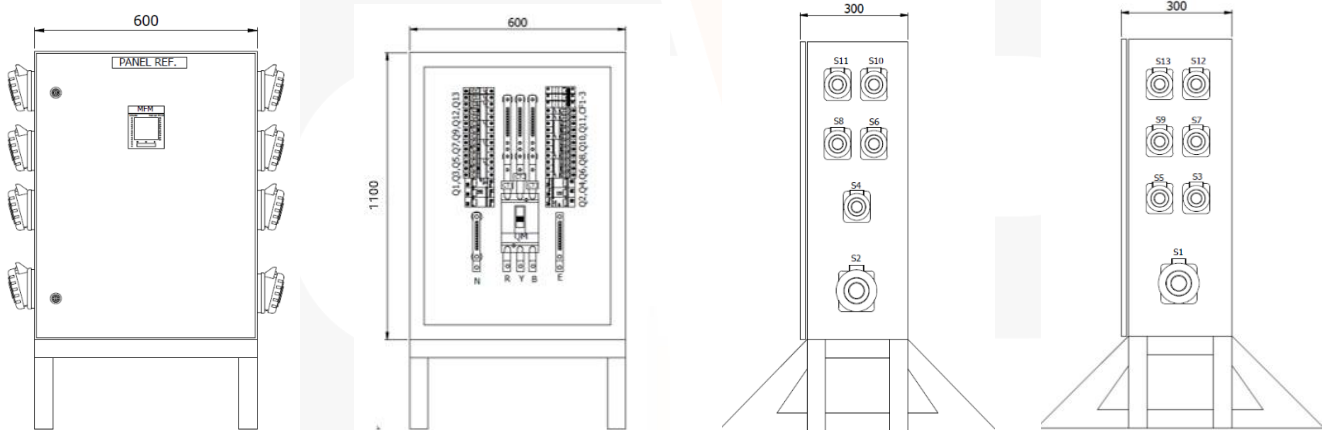

Height (H) mm	Width (W) mm	Length (L) mm
1100 mm	600 mm	300 mm

Weight (kg)	
Weight	55 kg

[www.rentalgp.com](http://www.rentalgp.com)

©2024 Glow Power Equipment Rental LLC

All rights reserved.

This publication is based on datasheets from respective manufacturers and is intended for informational purposes only. All trademarks and proprietary materials belong to their owners. Glow Power holds no rights to the technical data presented and does not intend to infringe upon copyrights or trademarks.