



GLOW POWER

RENTAL EQUIPMENT LLC

WWW.RENTALGP.COM

COMPANY PROFILE



INFO@RENTALGP.COM



+971 505107539



BUSINESS BAY, EMPIRE HEIGHTS A, OFFICE 9 DUBAI, U.A.E.



Energizing Your World



GLOW POWER



Contents



Company Overview	05	Cable Ramps	22
Diesel Generators	06	Secondary Distribution	24
Automatic Transfer Switch	08	Power Cables	30
Totalizing Panel	10	Fencing	34
Distribution Boards	12	Extinguishers	36
Black Distros	14	Service Offering	38
Fuel Tanks	16	Safety Standards & Certifications	40
Cooling	18	Contact Information	41
Tower Lights	20		



Company Overview



Brief introduction to GP Rental

At GP Rental, we are more than just a rental service—we are your partners in powering success. Specializing in providing reliable, efficient power solutions, we have been serving diverse industries with dedication and expertise. Whether it's an outdoor event, a construction site, or a critical infrastructure project, our equipment and services are designed to meet your specific needs, ensuring uninterrupted power, wherever and whenever you need it.

In the UAE, GP Rental is the most dependable partner for renting generators, tower lights, power cables, and power distribution units. GP Rental has everything you need to power your construction, oil and gas, or event site, including a wide selection of high-quality Power Generators, Power Distribution Units, and Power Cable Management in addition to knowledgeable electricians and technicians. Regardless of how big or little your event is, we assist you in determining the practical power needs and suggest the best equipment for you.

Core Services and Industries

GP Rental specializes in providing power solutions to a variety of sectors, such as events, private households, oils, construction sites, emergency responses and more. No matter the size or complexity of the project, our all-inclusive products and staff of knowledgeable experts guarantee a flawless outcome.

For any type of event whether indoor or outdoor, one-time or ongoing, product launch, sporting or entertainment, wedding, live performance, festival, or pop-up market, we offer a comprehensive solution. We provide dependable services that elevate your occasions.



Diesel Generators

Diesel Generators

Our power generators are the backbone of any operation requiring reliable energy. Available in various capacities, they are designed to function under the most extreme circumstances and are offered in a variety of capacities. They will supply steady, uninterrupted power to keep your activities operating efficiently.

Capacity (kVA)	Type	Make	Enclosure Type	Sound Pressure Levels(dBA) @7M	Dimension (LxWxH) (cm)	Weight (Kg)	Fuel Tank Capacity (L)	Controller Type	Synchronization
20	Diesel	Perkins	Canopy	67	186 x 89 x 125	833	56	DSE - FG ³	-
30	Diesel	Perkins	Canopy	62	186 x 89 x 125	846	56	DSE - FG ³	-
50	Diesel	Perkins	Canopy	62	229x 102 x 143	1025	145	DSE - FG ³	-
60	Diesel	Perkins	Canopy	63	229x 102 x 143	1067	145	DSE - FG ³	-
80	Diesel	Perkins	Canopy	65	229x 113 x 153	1202	188	DSE - FG ³	-
100	Diesel	Perkins	Canopy	71	276 x 113 x 154	1402	212	DSE - FG ³	-
132	Diesel	Perkins/Cummins	Canopy	74	342 x 114 x 202	1780	340	DSE - FG ³	EXT ⁴ / BUILT IN
150	Diesel	Perkins/Cummins	Canopy	68	352 x 113 x 168	1892	289	FG ³	-
180	Diesel	Perkins/Cummins	Canopy	74	341 x 113 x 202	2140	340	DSE	BUILT-IN
200	Diesel	Perkins/Cummins	Canopy	68	352 x 133 x 168	2238	384	DSE - FG ³	EXT ⁴ / BUILT IN
250	Diesel	Perkins/Cummins	Canopy	70	450 x 150 x 200	3055	500	DSE / PW ²	EXT ⁴ / BUILT IN
300	Diesel	Perkins/Cummins	Canopy	72	396 x 140 x 215	3158	699	DSE	BUILT-IN
350	Diesel	Perkins/Cummins	Canopy/Con ⁵	73	493 x 166 x 232	4575	887	DSE / DEIF ¹	BUILT-IN
400	Diesel	Perkins/Cummins	Canopy/Con ⁵	73	493 x 166 x 232	4575	887	DSE / DEIF ¹	BUILT-IN
450	Diesel	Perkins/Cummins	Canopy/Con ⁵	73	493 x 166 x 232	4667	887	DSE / DEIF ¹	BUILT-IN
500	Diesel	Perkins/Cummins	Canopy/Con ⁵	73	493 x 166 x 232	5033	887	DSE / DEIF ¹	BUILT-IN
550	Diesel	Perkins/Cummins	Canopy/Con ⁵	77	493 x 166 x 232	5071	887	DSE ¹ / DEIF ¹	BUILT-IN
650	Diesel	Perkins/Cummins/Caterpillar	Con ⁵	85	600 x 250 x 270	9278	2700	DSE / DEIF ¹	BUILT-IN
750	Diesel	Perkins/Cummins/Caterpillar	Con ⁵	85	600 x 250 x 270	9278	2700	DSE / DEIF ¹	BUILT-IN
850	Diesel	Perkins/Cummins/Caterpillar	Con ⁵	85	600 x 250 x 270	1455	2700	DSE / DEIF ¹	BUILT-IN
1000	Diesel	Perkins/Cummins/Caterpillar	Con ⁵	85	600 x 250 x 270	19100	2700	DSE / DEIF ¹	BUILT-IN
1250	Diesel	Perkins/Cummins/Caterpillar	Con ⁵	85	600 x 250 x 270	19100	2700	DSE / DEIF ¹	BUILT-IN

DEIF¹: AGC150 PW²: POWER WIZARD FG³: FG100 EXT⁴: EXTERNAL CON⁵: CONTAINERIZED



Automatic Transfer Switch

Our Automatic Transfer Switches ensure smooth switching between power sources. Designed to provide unmatched dependability for important applications, they immediately transition to a backup power source in the event that the primary source fails.

Rated Current (A)	Rated Voltage (v)	Termination Type	Transfer Type	Weight (Kg)	Dimension (LxWxH) (cm)
250	480	Busbar	Auto / Manual	39	60 x 32 x 110
400	480	Busbar	Auto / Manual	44	60 x 40 x 120
630	480	Busbar	Auto / Manual	66	60 x 40 x 120
800	480	Busbar	Auto / Manual	125	77 x 60 x 140





Totalizing Panels



Totalizing Panel

An all-in-one solution for managing power distribution is offered by our totalizing panels. They guarantee that your power use is optimized and effectively regulated, making them perfect for large-scale operations.

Rated Current (A)	Rated Voltage (v)	Incoming	Outgoing	Outgoing Quantity	Dimension (LxWxH) (cm)
800	480	Busbar	160A, 3P MCCB 36KA	2	100 x 40 x 170
			250A, 3P MCCB 36KA	1	
			400A, 3P MCCB 36KA	1	
1250	480	Busbar	160A, 3P MCCB 36KA	2	120 x 40 x 170
			250A, 3P MCCB 36KA	2	
			400A, 3P MCCB 36KA	2	
2500	480	Busbar	160A, 3P MCCB 36KA	1	160 x 60 x 160
			250A, 3P MCCB 36KA	2	
			400A, 3P MCCB 36KA	2	
			630A, 3P MCCB 36KA	2	



Distribution Boards



Distribution Boards

Our Distribution Boards offer a centralized hub for controlling your power distribution and are built with flexibility and safety in mind. They are necessary for every project that calls for safe, well-organized power management, whether they are temporary setups or long-term installations.



63A Distribution Board	
Enclosure	Weather proof enclosure
Inlet	63A Male
Outlet	1x32A 5pin
	3x32A 3pin
	2x16A 3pin
Dimensions (H*W*L) cm	17.5x30x25



160A Distribution Board	
Enclosure	Weather proof enclosure
Inlet	1x160A Breaker
Outlet	1x125A 5pin
	2x63A 5pin
	3x32A 5pin
	3x32A 3pin
Dimensions (H*W*L) cm	85x50x25



250A Distribution Board	
Enclosure	Weather proof enclosure
Inlet	1x250A Breaker
Outlet	2x125A 5pin
	3x63A 5pin
	4x32A 5pin
	4x32A 3pin
Dimensions (H*W*L) cm	110x60x30



400A Distribution Board	
Enclosure	Weather proof enclosure
Inlet	1x400A Breaker
Outlet	4x125A 5pin
	4x63A 5pin
	4x32A 5pin
	4x32A 3pin
Dimensions (H*W*L) cm	130x80x30

Black Distrots

Our Black Distribution Units (Distros) are made to distribute power smoothly and effectively in both transient and long-term configurations. They guarantee that power is routed uniformly and safely across all of your equipment, reducing downtime and increasing production, thanks to their sturdy construction and user-friendly design. Since it is RCD protected, it monitors the leakage current and trips beyond a 3mA leakage.



DISTRO RD32	
Enclosure	Shockproof HDPE Enclosure IK Rating: IK10
Inlet	1 x 32A 400v Inlet 3P+N+E 6h IP67
Outlet	3 x 16A 230v Panel Socket 1P+N+E 6h IP44 3 x 32A 230v Panel Socket 1P+N+E 6h IP44
Dimensions (H*W*L) cm	34x40x35



DISTRO RD63	
Enclosure	Material: Shockproof HDPE Enclosure IK Rating: IK10
Inlet	1 x 63A 400v Inlet 3P+N+E 6h IP67
Outlet	1 x 63A 400V Outlet 3P+N+E 6h IP67 2 x 32A 400V Panel socket 3P+N+E 6h IP44 6 x 32A 230V Panel socket 1P+N+E 6h IP44 6 x 16A 230V Panel socket 1P+N+E 6h IP44
Dimensions (H*W*L) cm	54.5x60x40



DISTRO RDI25	
Enclosure	Material: Shockproof HDPE IP66 IK Rating: IK10
Inlet	1 x 125A 400v Inlet 3P+N+E 6h IP67
Outlet	2 x 63A 400v Panel Socket 3P+N+E 6h IP67 4 x 32A 400v Panel Socket 3P+N+E 6h IP44 6 x 32A 230v Panel Socket 1P+N+E 6h IP44 6 x 16A 230v Panel Socket 1P+N+E 6h IP44
Dimensions (H*W*L) cm	70x60x40



DISTRO RD250	
Enclosure	Material: Shockproof HDPE IP66 IK Rating: IK10
Inlet	1 x 400A 400v LI+L2+L3+N+E, IP67 6h Power lock Panel Drain Set
Outlet	4 x 32A 230v Panel Socket 1P+N+E 6h IP44 4 x 32A 400v Panel Socket 3P+N+E 6h IP44 3 x 63A 400v Panel Socket 3P+N+E 6h IP67 2 x 125A 400v Panel Socket 3P+N+E 6h IP67
Dimensions (H*W*L) cm	90x60x60



DISTRO RD400	
Enclosure	Material: Shockproof HDPE IP66 IK Rating: IK10
Inlet	1 x 400A 400v LI+L2+L3+N+E, IP67 6h Powerlock Panel Drain Set
Outlet	6 x 16A 230v Panel Socket 1P+N+E 6h IP44 – 2 Sockets per Phase 6 x 32A 230v Panel Socket 1P+N+E 6h IP44 – 1 Socket per Phase 6 x 32A 400v Panel Socket 3P+N+E 6h IP44 3 x 63A 400v Panel Socket 3P+N+E 6h IP67 3 x 125A 400v Panel Socket 3P+N+E 6h IP67
Dimensions (H*W*L) cm	110x60x60

Fuel Tanks




Fuel Tanks

Our fuel tanks are crucial for maintaining a steady power supply, particularly in isolated areas or during prolonged activities. Built to last, these long-lasting tanks come in a range of capacities, giving you the freedom to satisfy any project's fuel requirements. Every tank has connectors that are simple to use and are designed to avoid spills.



Capacity (L)	Safe Fill (L)	Dry Weight (Kg)	Dimension (LxWxH) (cm)	Wall Type	Material Used
957	905	405	113 x 113 x 127	Double Wall	Carbon Steel
2063	1960	750	223 x 113 x 127	Double Wall	Carbon Steel
2850	2710	868	223 x 152 x 127	Double Wall	Carbon Steel
4460	4240	1155	223x 231 x 127	Double Wall	Carbon Steel
7200	6840	2280	394x 221 x 119	Double Wall	Carbon Steel

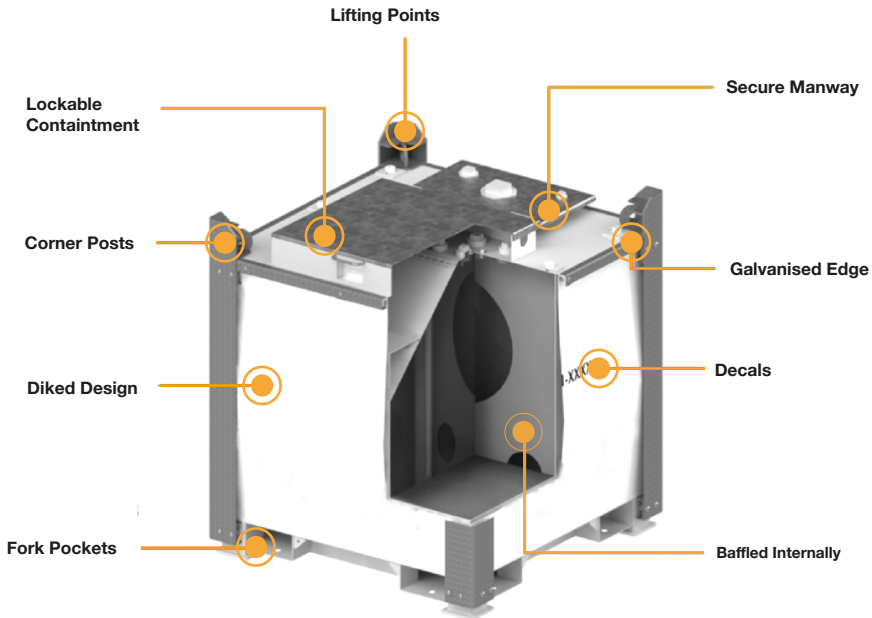



Cooling

Cooling

Use our climate control equipments to keep your operations pleasant and cool. Large areas benefit greatly from these high-capacity AC units, which consistently maintain a comfortable temperature even in the most demanding settings. They guarantee that your staff and equipment remain cool, enabling you to continue operating at peak efficiency. They are simple to install and maintain.



5 TON-Split AC	
Input	4520 W
Capacity	5 TON
Rated Current	13 A



10 TON-Chiller	
Input	11 - 12 kW
Capacity	10 TON
Rated Current	21 A



25 TON-Chiller	
Input	32 - 38 kW
Capacity	25 TON
Rated Current	61 A



100 TON-Chiller	
Input	210 - 250 kW
Capacity	100 TON
Rated Current	400 A




Towers Lights

Tower Lights

Any job that calls for reliable, portable illumination must have our Tower Lights. These lights are made for outdoor usage and offer strong lighting across wide regions, which makes them perfect for: festivals, building projects, and emergency scenarios. Their movable heights and many lighting choices provide unmatched adaptability and dependability.



Height	Lifting System	Illuminated Area	Power Generator	Noise	luminosity	Floodlights
8.3 m	Hydraulic	9152 m²	3.5 KVA 230V	60 dB(A) @ 7m	211200 Lm	4x320W LED
6.8 m	Manual	7900 m²	3.5 KVA 230V	60 dB(A) @ 7m	211200 Lm	4x320W LED
8.3 m	Hydraulic	12536 m²	8 KVA 230V	63 dB(A) @ 7m	276000 Lm	6x320W LED
8.3 m	Manual	12536 m²	8 KVA 230V	63 dB(A) @ 7m	276000 Lm	6x320W LED

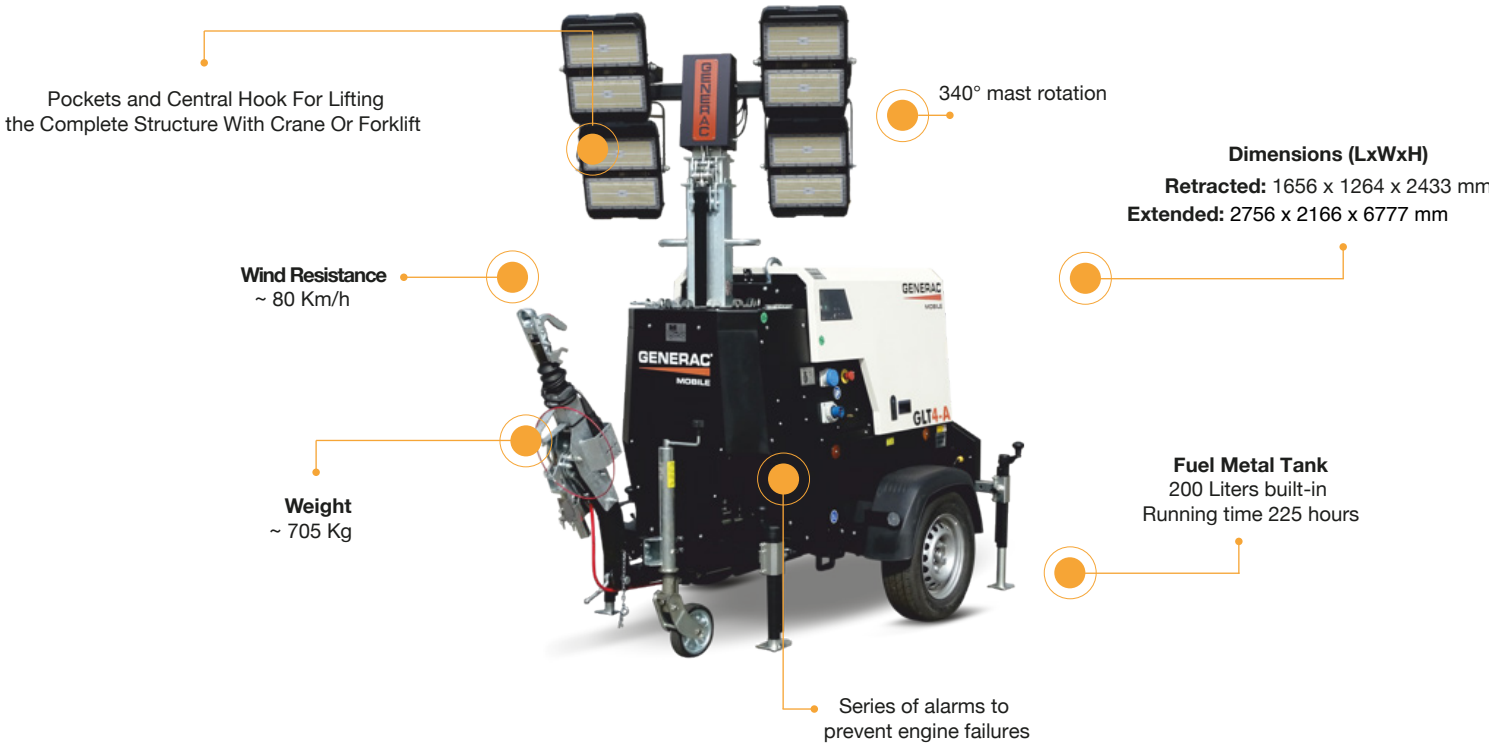



Cable Ramps



Cable Ramps

With our sturdy Cable Ramps, you can safeguard your cords and provide a secure working environment. The integrity of your power and data cables in high-traffic areas depends on these ramps, which are made to endure heavy foot and vehicle traffic. They can be easily installed and customized to fit any room thanks to their modular architecture.



SINGLE CHANNEL CABLE RAMPS
DIMENSIONS (LxWxH): 100 x 15 x 3 cm
WEIGHT: 3 Kg




TWO CHANNEL CABLE RAMPS
DIMENSIONS (LxWxH): 100 x 25 x 5 cm
WEIGHT: 6.2 Kg



THREE CHANNEL CABLE RAMPS
DIMENSIONS (LxWxH): 90 x 45 x 6 cm
WEIGHT: 9 Kg



HEAVY DUTY CABLE RAMPS
DIMENSIONS (LxWxH): 90 x 50 x 5 cm
WEIGHT: 13 Kg

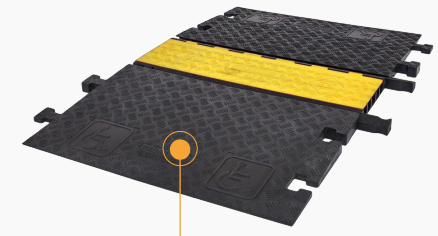

ADA CABLE RAMPS
DIMENSIONS (LxWxH): 100 x 85 x 30 cm
WEIGHT: 9.68 Kg

Secondary Distribution

Secondary Distribution

Our Secondary Distribution solutions, including high-quality plugs, sockets, and extensions, are designed to ensure safe and efficient power delivery across your site. These essential components provide the flexibility needed to extend and manage power distribution with ease, ensuring that every piece of equipment operates smoothly and securely. Whether for temporary setups or permanent installations, our reliable products are built to withstand the demands of any environment.



Connectors, Plugs & Sockets

The greatest requirements for dependability and safety are met by the design of our selection of plugs and sockets. They are an essential part of any power distribution arrangement since they are easily installed and come in a variety of configurations to suit different applications. They also provide safeguarded and secure connections.



POWER LOCK	
Connector type	Male - Female
Voltage	220V - 400V
Rating	400A



3P CEE CONNECTORS	
Connector type	Male - Female
Voltage	220V
Rating	16A - 32A
Phase type	Single Phase



5P CEE CONNECTORS	
Connector type	Male - Female
Voltage	400V
Rating	32A - 63A - 125A
Phase type	3-Phase

Extensions

We design our Extensions to offer dependable power connections across long distances. They come in a variety of lengths and configurations and are made to withstand heavy loads with little voltage loss. These extensions are necessary for securely and effectively connecting your equipment, whether it is being used indoors or outside.



POWER LOCK M-F	
Connector type	Male - Female
Voltage	220V - 400V
Rating	400A
Length	(10 - 15 - 25 - 50 - 100) m



POWER LOCK L-M	
Connector type	Lug - Male
Voltage	400V
Rating	400A
Length	(5) m



POWER LOCK L-F	
Connector type	Lug - Female
Voltage	400V
Rating	400A
Length	(5) m



3P CEE EXTENSION	
Connector type	Male - Female
Voltage	220V
Rating	16A
Phase type	Single Phase
Length	(10 - 15 - 25 - 50) m



3P CEE EXTENSION	
Connector type	Male - Female
Voltage	220V
Rating	32A
Phase type	Single Phase
Length	(15 - 25 - 50) m



5P CEE EXTENSION	
Connector type	Male - Female
Voltage	220V - 400V
Rating	32A
Phase type	3-Phase
Length	(10 - 25 - 50 - 100) m



5P CEE EXTENSION	
Connector type	Male - Female
Voltage	220V - 400V
Phase type	3-Phase
Rating	63A
Length	(10 - 15 - 25 - 50 - 100) m



5P CEE EXTENSION	
Connector type	Male - Female
Voltage	220V - 400V
Rating	125A
Phase type	3-Phase
Length	(10 - 15 - 25 - 50 - 100) m



TWIN SOCKET	
Connector type	CEE
Voltage	220V
Rating	16A
Phase type	Single Phase
Length	(2 - 5 - 10) m



IP65 TWIN SOCKET	
Connector type	CEE
Voltage	220V
Rating	16A
Phase type	Single Phase
Length	(5 - 10 - 15) m



GANGWAY	
Connector type	CEE
Voltage	220V
Rating	16A
Phase type	Single Phase
Length	(1) m



3P CEE SPLITTER	
Connector type	Male - 2 Female
Voltage	220V
Rating	16A - 32A
Phase type	Single Phase



5P CEE SPLITTER	
Connector type	Male - 2 Female
Voltage	220V - 400V
Rating	32A - 63A - 125A
Phase type	3-Phase



3P CEE - TAIL SPLITTER	
Connector type	Lug - Female/Male
Voltage	220V - 400V
Rating	32A - 63A - 125A
Phase type	3-Phase



“Universal Love is the standard-sized socket that everyone can plug into.”

ALLISON MACKIE

Power Cables

1-Core and 5- Core Cables

Our power cables are LINEAX cables by NEXANS, built for reliability and heavy-duty performance in demanding rental power applications. Designed with robust insulation and superior conductivity, they ensure efficient and secure power transmission, even in the toughest conditions. Whether for generators, tower lights, or other power-intensive setups, our LINEAX cables guarantee durability, safety, and minimal downtime.



5-Core Cables:

A 5-core cable “Lineax by Nexans” has five insulated conductors, ideal for complex systems or multiphase connections.



LINEAX 5G6	
Conductor Material	Copper
No. of Cores	5
Conductor Cross-Section	6 mm²
Lengths	(10 - 15 - 25 - 50 - 100) m
Termination	CEE
Rating	32A



LINEAX 5G10	
Conductor Material	Copper
No. of Cores	5
Conductor Cross-Section	10 mm²
Lengths	(10 - 15 - 25 - 50 - 100) m
Termination	CEE
Rating	63A



LINEAX 5G25	
Conductor Material	Copper
No. of Cores	5
Conductor Cross-Section	25 mm²
Lengths	(10 - 25 - 50 - 100) m
Termination	CEE
Rating	125A



LINEAX 5G35	
Conductor Material	Copper
No. of Cores	5
Conductor Cross-Section	35 mm²
Lengths	(10 - 25 - 50 - 100) m
Termination	Lug - Lug
Rating	150A



LINEAX 5G50	
Conductor Material	Copper
No. of Cores	5
Conductor Cross-Section	50 mm²
Lengths	(10 - 50 - 100) m
Termination	Lug - Lug
Rating	192A



I-Core Cables:

A 1-core cable “Lineax by Nexans” has a single insulated conductor, ideal for heavy duty power transmission.



LINEAX IX70	
Conductor Material	Copper
No. of Cores	1
Conductor Cross-Section	70 mm ²
Lengths	(5 - 10 - 50 - 100) m
Termination	PL - PL / Lug - Lug / Lug - PL
Rating	268A



LINEAX IX120	
Conductor Material	Copper
No. of Cores	1
Conductor Cross-Section	120 mm ²
Lengths	(5 - 10 - 50 - 100) m
Termination	PL - PL / Lug - Lug / Lug - PL
Rating	382A



LINEAX IX150	
Conductor Material	Copper
No. of Cores	1
Conductor Cross-Section	150 mm ²
Lengths	(5 - 10 - 25 - 50 - 100) m
Termination	PL - PL / Lug - Lug / Lug - PL
Rating	441A



LINEAX IX240	
Conductor Material	Copper
No. of Cores	1
Conductor Cross-Section	240 mm ²
Lengths	(10 - 25 - 50 - 100) m
Termination	PL - PL / Lug - Lug / Lug - PL
Rating	599A



Police Barriers and Heras fence

With our Police Barriers and Heras Fences, you can be confident that your site is both organized and secure. These walls and barriers are incredibly sturdy and simple to set up, making them perfect for crowd control, perimeter security, and site delineation. They are a necessary component of every event or building site, giving you the assurance that everything is safe and well-organized.



Police Barrier

Length:	245 cm
Height:	90 cm

Heras Fence	
Length:	350 cm
Height:	200 cm



Extinguishers



Included Safety Gear for Rental Sites

Ensuring a safe work environment is a top priority. Each rental setup includes essential safety equipment, such as fire extinguishers, to enhance on-site protection. While these items are not available for individual rental, they are strategically placed at sites to comply with safety regulations and provide immediate response in case of emergencies.



DRY POWDER FIRE EXTINGUISHER	
Type	Powder
Weight (Kg/L)	2, 6
Class	A, B, C, D, E



FOAM FIRE EXTINGUISHER	
Type	Foam
Weight (Kg/L)	6, 25
Class	A, B



CO ₂ FIRE EXTINGUISHER	
Type	CO2
Weight (Kg/L)	4.5, 6.5
Class	B, E

Services Offering



Site Power Planning & Layout

A detailed site study and CAD-generated layout ensure optimal placement of rental power equipment for efficient and safe operation.



Fuel Supply & Management

Continuous fuel monitoring and supply to prevent downtime and optimize consumption.



Certified Equipment Operators

Trained professionals ensure seamless operation, routine maintenance, and on-site troubleshooting.



Engineering Analysis & Load Calculation

Precision power assessment to determine exact energy requirements, ensuring optimal efficiency and cost-effectiveness.



┌ Safety Standards & Certifications

Safety Standards

At GP Rental, safety is our top priority. We adhere to the highest industry standards to ensure the well-being of our clients and our team. Our equipment is regularly inspected and maintained to comply with all relevant certifications, providing peace of mind that your power needs are met safely and efficiently.



ISO 9001:2015 is an international standard for quality management systems (QMS) that helps organizations ensure they meet customer and regulatory requirements while promoting continuous improvement.

ISO 14001:2015 is an international standard for environmental management systems (EMS) that provides a framework for organizations to improve environmental performance, reduce waste, and manage environmental responsibilities effectively.

ISO 45001:2018 is an international standard for occupational health and safety management systems (OHSMS), aimed at helping organizations create safer workplaces by reducing risks, preventing work-related injuries, and promoting employee well-being.

┌ Contact Us

Get in Touch

☎ +971 505107539

🌐 WWW.RENTALGP.COM

✉ INFO@RENTALGP.COM

📍 BUSINESS BAY, EMPIRE HEIGHTS A,
OFFICE 9 DUBAI, U.A.E.

